


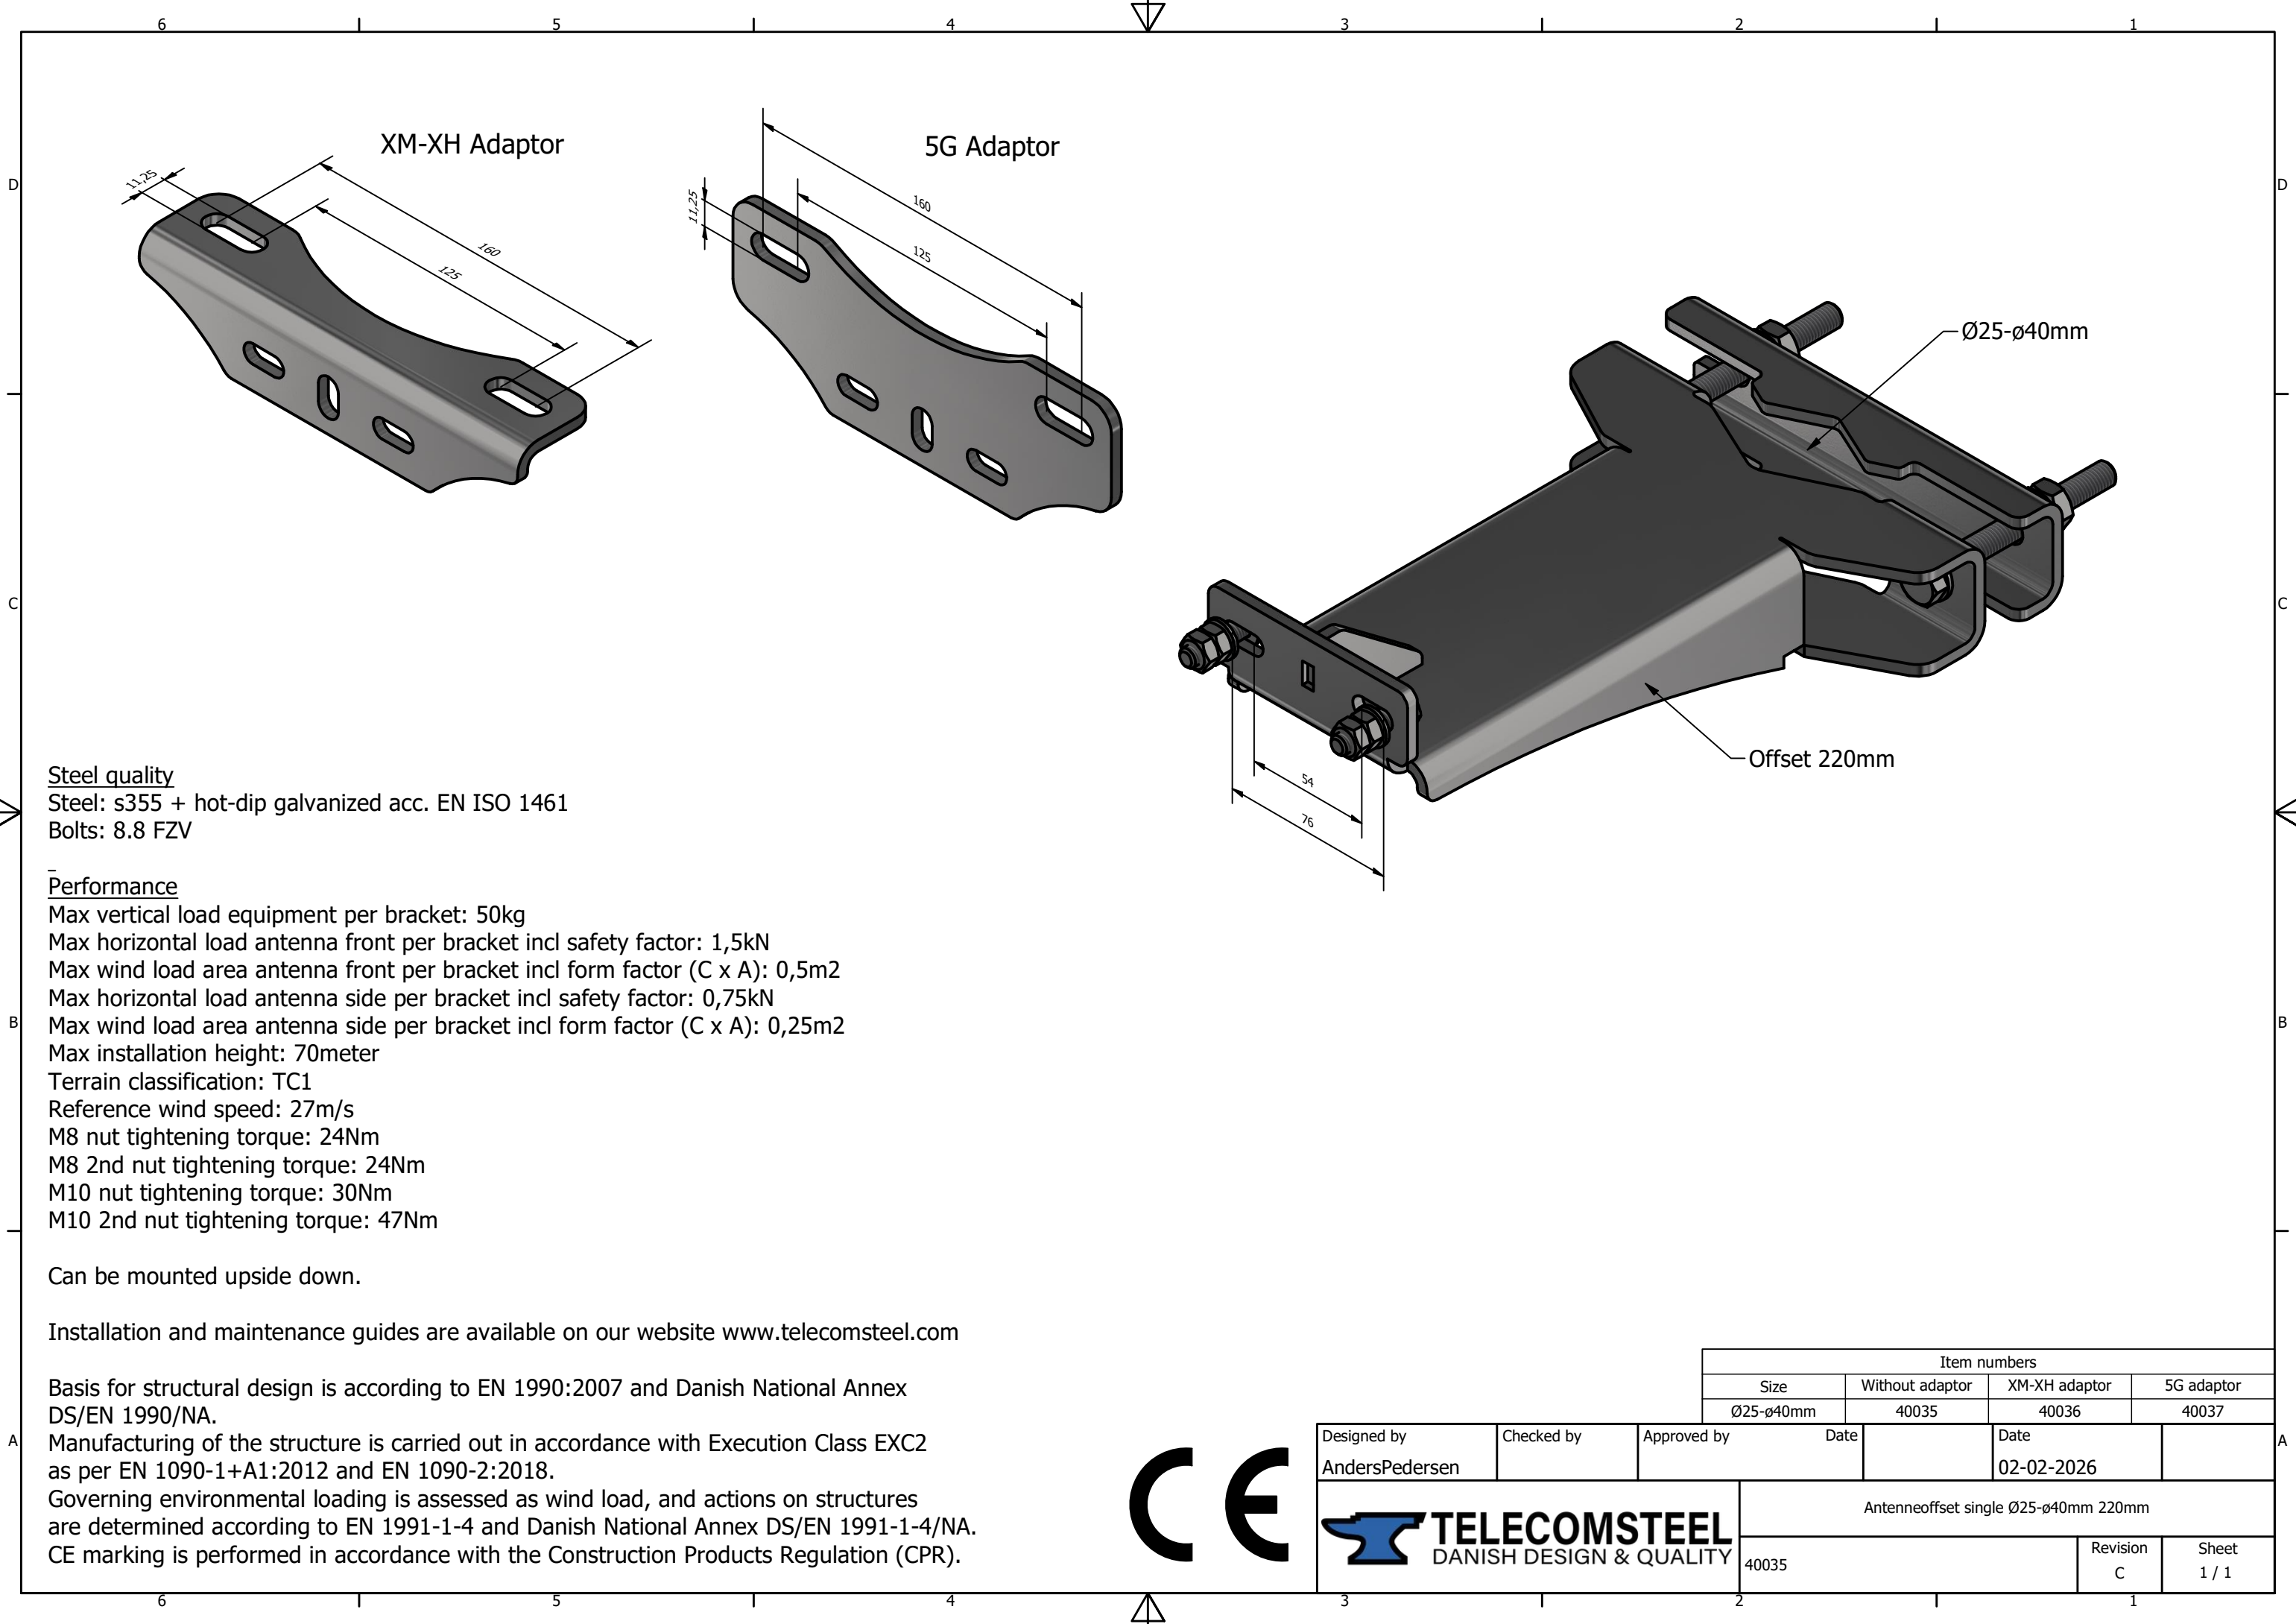

Steel quality
Steel: s355 + hot-dip galvanized acc. EN ISO 1461
Bolts: 8.8 FZV

- Performance**
- Max vertical load equipment per bracket: 50kg
 - Max horizontal load antenna front per bracket incl safety factor: 1,5kN
 - Max wind load area antenna front per bracket incl form factor (C x A): 0,5m2
 - Max horizontal load antenna side per bracket incl safety factor: 0,75kN
 - Max wind load area antenna side per bracket incl form factor (C x A): 0,25m2
 - Max installation height: 70meter
 - Terrain classification: TC1
 - Reference wind speed: 27m/s
 - M8 nut tightening torque: 24Nm
 - M8 2nd nut tightening torque: 24Nm
 - M10 nut tightening torque: 30Nm
 - M10 2nd nut tightening torque: 47Nm

Can be mounted upside down.

Installation and maintenance guides are available on our website www.telecomsteel.com

Basis for structural design is according to EN 1990:2007 and Danish National Annex DS/EN 1990/NA.

Manufacturing of the structure is carried out in accordance with Execution Class EXC2 as per EN 1090-1+A1:2012 and EN 1090-2:2018.

Governing environmental loading is assessed as wind load, and actions on structures are determined according to EN 1991-1-4 and Danish National Annex DS/EN 1991-1-4/NA.

CE marking is performed in accordance with the Construction Products Regulation (CPR).



Designed by AndersPedersen	Checked by	Approved by	Date		Date 02-02-2026	
 TELECOMSTEEL DANISH DESIGN & QUALITY			Antenneoffset single Ø25-ø40mm 220mm			
			40035	Revision C	Sheet 1 / 1	